

> ARMOR line

▶ Metalno kućište



↑
Visoka otpornost na udar
sa vrhunskim estetskim vrednostima
↓

High impact resistance
with top aesthetic values

ARMOR line

Metal housing



ARMOR line

Označavanje boja prednjih elemenata

Površinska zaštita metala izvedena je visokokvalitetnim premazom otpornim na oštećenja koji se izrađuje u dve boje.

Označavanje proizvoda izvedeno je u skladu sa korištenim bojama:

prva cifra - šifra boje kućišta
 druga cifra - šifra boje tastera sklopke ili poklopca priključnice



siva / grey (RAL 7035),




antracit / anthracite (RAL 3004)

Colour designation of front elements

Metal surface protection is derived with high quality coat resistant to damaging which can be made in two colors,

Product marking is given by two-digit code of product describing the particular elements:

first digit - code of housing colour
 second digit - code of switch colour or socket cover

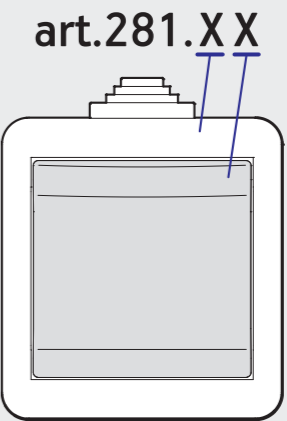

ARMOR line je metalni program napravljen da bude dopadljiv, robusan i da obezbedi izradu instalacija sa stepenom zaštite IP 55 prema IEC 60529.

Kompletno metalno kućište predstavlja pravi oklop postavljen da zaštiti od slučajnog udara i vandalskog napada.


ARMOR line is a metal line designed to be pretty, robust and provide installation building with protection degree IP 55 according to IEC 60529.

All metal housing is an armoring installed to protect from random mechanical shock and vandalic stroke.




Sklopke na zid postavljamo jednostavnim pričvršćivanjem kutije sa dva vijka (prečnika 3,5 - 4 mm, mogu se koristiti bilo koji vijci u zavisnosti od podloge), standardnim provlačenjem kabela kroz uvodnicu i priključenjem provodnika. Sklopku postavimo na oslonce u kutiji i blok pričvrstimo pripadajućim vijcima. Da bi se obezbedio stepen zaštite IP 55 prilikom postavljanja tela sklopke i bloka vodimo računa o tome koju stranu okrenuti prema gore.

We install the wall mounted switches by simple fixing of the box by two screws (dia. 3,5-4 mm, any screws may be used depending on base), by standard cable pulling through the cable bushing and conductor connecting. We set up the switch onto the supports in the box and we fasten the block by relevant screws. When setting up the switch body and the block we take care which side to turn upwards in order to provide IP 55 degree of protection.

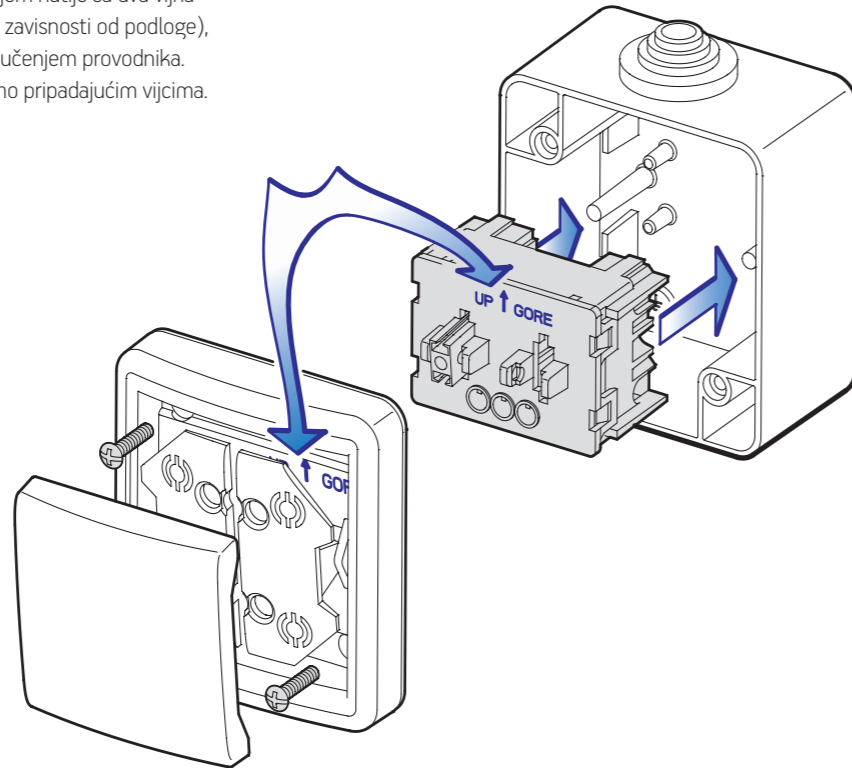


Ukoliko je kućište potrebno snabdeti otvorima za oticanje kondenzovane vlage ili vode koja je prodrla u unutrašnjost, dovoljno je snažnim udarcem izbiti kvadratni deo na oslabljenom dnu kutije.

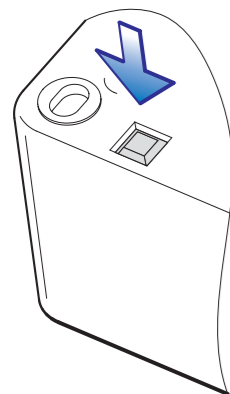

If the housing is to be provided with holes for discharging of condensed moisture or water penetrated inside, it is sufficient to punch strongly to the weakened points on box bottom.

Posebnom izvedbom zaptivnih elemenata obezbeđuje se zaštita od prodora vode i prašine na spojevima kutije i bloka (1), oko veze tastera i tipkala za preklapanje (2) i oko signalne tinjalice (3), čime se postiže visok IP stepen zaštite.

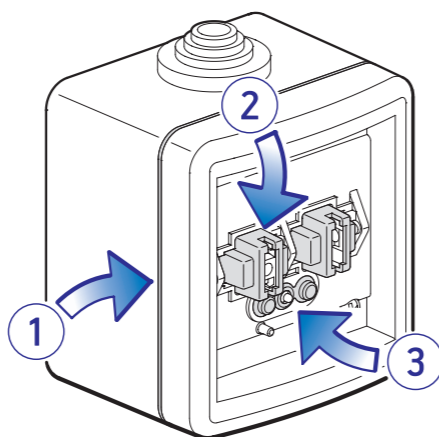

With special design of sealing gland protection from water and dust is provided on box and block connection (1), around button and rocker connection (2) and pilot light (3). This is design for high IP degree of protection.

> SKLOPKE 10A i 16A

> 10 and 16A SWITCHES

▶ Sklopka jednopolna za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

art. **281.1A** siva sa antracit tasterom

▶ Wall mounted single-pole switch IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm

art. **281.1A** grey with anthracite button



▶ Sklopka serijska za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

art. **282.1A** siva sa antracit tasterom

▶ Wall mounted serial switch IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm

art. **282.1A** grey with anthracite button



▶ Sklopka naizmjenična za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

art. **283.1A** siva sa antracit tasterom

▶ Wall mounted alternative switch IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm

art. **283.1A** grey with anthracite button



▶ Sklopka ukrсна za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

art. **284.1A** siva sa antracit tasterom

▶ Wall mounted cross-switch IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm


art. **284.1A** grey with anthracite button



▶ DIMENZIJE ZA UGRADNJU (sa rasporedom otvora za pričvršćivanje)

INSTALLATION DIMENSIONS (with the lay out of fixing holes)

Sklopke
Switches

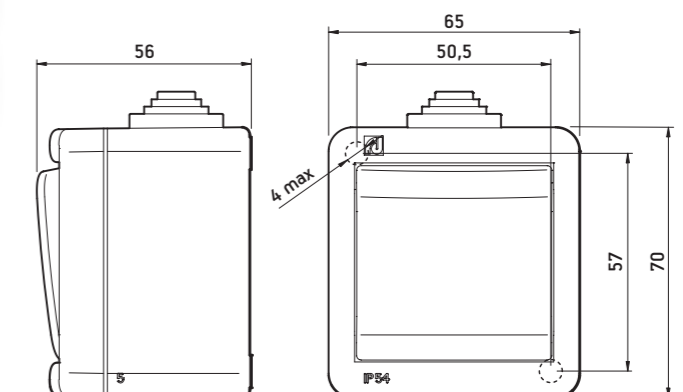

Taster sklopka za svetlo za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

art. **285.1A** siva sa antracit tasterom

Wall mounted light push-button switch IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm

art. **285.1A** grey with anthracite button



Sklopka jednopolna sa indikacijom za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,
- Indikacija svetli kada je sklopka isključena

art. **2811.1A** siva sa antracit tasterom

Wall mounted single-pole switch with indication IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm
- Indication turns on when the switch is off

art. **2811.1A** grey with anthracite button



Taster sklopka za svetlo sa indikacijom za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,
- Indikacija svetli kada je sklopka isključena

art. **2851.1A** siva sa antracit tasterom

Wall mounted light push-button switch with indication IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm
- Indication turns on when the switch is off

art. **2851.1A** grey with anthracite button



Sklopka serijska sa indikacijom za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,
- Indikacija svetli kada je sklopka isključena

art. **2821.1A** siva sa antracit tasterom

Wall mounted serial switch with indication IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm
- Indication turns on when the switch is off

art. **2821.1A** grey with anthracite button



Taster sklopka za zvono za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

art. **286.1A** siva sa antracit tasterom

Wall mounted bell push-button switch IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm

art. **286.1A** grey with anthracite button



Sklopka naizmenična sa indikacijom za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,
- Indikacija svetli kada je strujno kolo otvoreno

art. **2831.1A** siva sa antracit tasterom

Wall mounted alternative switch with indication IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm
- Indication turns on when the circuit is open

art. **2831.1A** grey with anthracite button



Taster sklopka za zvono sa indikacijom za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,
- Indikacija svetli kada je sklopka isključena

art. **2861.1A** siva sa antracit tasterom

Wall mounted bell push-button switch with indication IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm
- Indication turns on when the switch is off

art. **2861.1A** grey with anthracite button



Sklopka ukrсна sa indikacijom za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,
- Indikacija svetli kada je strujno kolo otvoreno

art. **2841.1A** siva sa antracit tasterom

Wall mounted cross-switch with indication IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm
- Indication turns on when the circuit is open

art. **2841.1A** grey with anthracite button



Taster sklopka za roletne za na zid IP 55 10AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,
- Dve taster sklopke za direktno pokretanje elektromotora za dizanje i spuštanje roletni,
- Blokada mogućnosti uključivanja kretanja istovremeno u oba smera

art. **287.1A** siva sa antracit tasterom

Wall mounted rolling shutters switch IP 55 10AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm
- Two push-button switches for direct activation of rolling shutters lifting and lowering electric motor
- Locking of movement switching-in possibilities simultaneously in both directions

art. **287.1A** grey with anthracite button



Sklopka jednopolna sa indikacijom za na zid IP 55 16AX/250V~ metalna

- Usaglašeno sa IEC 60669-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,

- Indikacija svetli kada je sklopka isključena
art. **289.1A** siva sa antracit tasterom

- Indikacija svetli kada je sklopka uključena
art. **2891.1A** siva sa antracit tasterom

Wall mounted single-pole switch with indication IP 55 16AX/250V~ metal

- Complied with IEC 60669-1,
- Wall mounting by screws dia. to 4 mm

- Indication turns on when the switch is off
art. **289.1A** grey with anthracite button

- Indication turns on when the switch is on
art. **2891.1A** grey with anthracite button



ARMOR line

PRIKLJUČNICE > SOCKETS

Priključnica dvopolna za na zid IP 55 16A/250V~ sa porcelanskim jezgrom - metalna

- Usaglašeno sa IEC 60884-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

art. 271.1A siva sa antracit poklopcem

Wall mounted double-pole socket outlet IP 55 16A/250V~ with porcelain insert - metal

- Complied with IEC 60884-1,
- Wall mounting by screws dia. to 4 mm

art. 271.1A grey with anthracite cover



Priključnica dvopolna za na zid IP 55 16A/250V~ sa polikarbonatskim jezgrom - metalna

- Usaglašeno sa IEC 60884-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

art. 2711.1A siva sa antracit poklopcem

Wall mounted double-pole socket outlet IP 55 16A/250V~ with polycarbonate insert - metal

- Complied with IEC 60884-1,
- Wall mounting by screws dia. to 4 mm

art. 2711.1A grey with anthracite cover



Priključnica dvopolna za na zid IP 55 16A/250V~ sa polikarbonatskim jezgrom Francuski standard - metalna

- Usaglašeno sa IEC 60884-1, NF C 61-314
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

art. 2751.1A siva sa antracit poklopcem

Wall mounted double-pole socket outlet IP 55 16A/250V~ with polycarbonate insert French standard - metal

- Complied with IEC 60884-1, NF C 61-314,
- Wall mounting by screws dia. to 4 mm

art. 2751.1A grey with anthracite cover



Priključnica trolepolna za na zid IP 55 16A/440V~ sa porcelanskim jezgrom - metalna

- Usaglašeno sa IEC 60884-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm

art. 273.1A siva sa antracit poklopcem

Wall mounted tripolar socket outlet IP 55 16A/440V~ with porcelain insert - metal

- Complied with IEC 60884-1,
- Wall mounting by screws dia. to 4 mm

art. 273.1A grey with anthracite cover



RAZVODNE KUTIJE >

Kutija razvodna sa 3 uvoda za na zid 80x70 IP 55 500V - metalna

- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,
- Uvodnice za kablove do Ø14 mm

art. 291.1 siva

JUNCTION BOXES >

Wall mounted junction box with 3 cable glands 80x70 IP 55 500V - metal

- Complied with IEC 60670-1,
- Wall mounting by screws dia. to 4 mm
- Cable bushings to Ø14 mm

art. 291.1 grey



Kutija razvodna sa 4 uvoda za na zid 80x70 IP 55 500V - metalna

- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,
- Uvodnice za kablove do Ø14 mm

art. 292.1 siva

Wall mounted junction box with 4 cable glands 80x70 IP 55 500V - metal

- Complied with IEC 60670-1,
- Wall mounting by screws dia. to 4 mm
- Cable bushings to Ø14 mm

art. 292.1 grey



Kutija razvodna sa 6 uvoda za na zid 80x70 IP 55 500V - metalna

- Usaglašeno sa IEC 60670-1,
- Ugradnja na zid pomoću vijaka prečnika do 4 mm,
- Uvodnice za kablove do Ø14 mm

art. 293.1 siva

Wall mounted junction box with 6 cable glands 80x70 IP 55 500V - metal

- Complied with IEC 60670-1,
- Wall mounting by screws dia. to 4 mm
- Cable bushings to Ø14 mm

art. 293.1 grey



DIMENZIJE ZA UGRADNJU (sa rasporedom otvora za pričvršćivanje)

INSTALLATION DIMENSIONS (with the lay out of fixing holes)

