

# CH10x38 gG 8A/500V



## Specifikacije

Šifra proizvoda	002620006
Opis	CH10x38 gG 8A/500V
Težina	7.6
Nivo	Cilindrični topljivi umetci (gG)
AC Prekidna moć	100
Karakteristika	gG
Dimenzija	10X38
Grupa proizvoda	Niskonaponski cilindrični topljivi umetci C
Nazivni AC napon	500
Nazivna struja	8
Veličina	CH10
Tip	CH

Web stranica proizvoda 


## Druga dokumentacija




CE izjava

Tehnički podaci

# Karakteristike granične propuštene struje

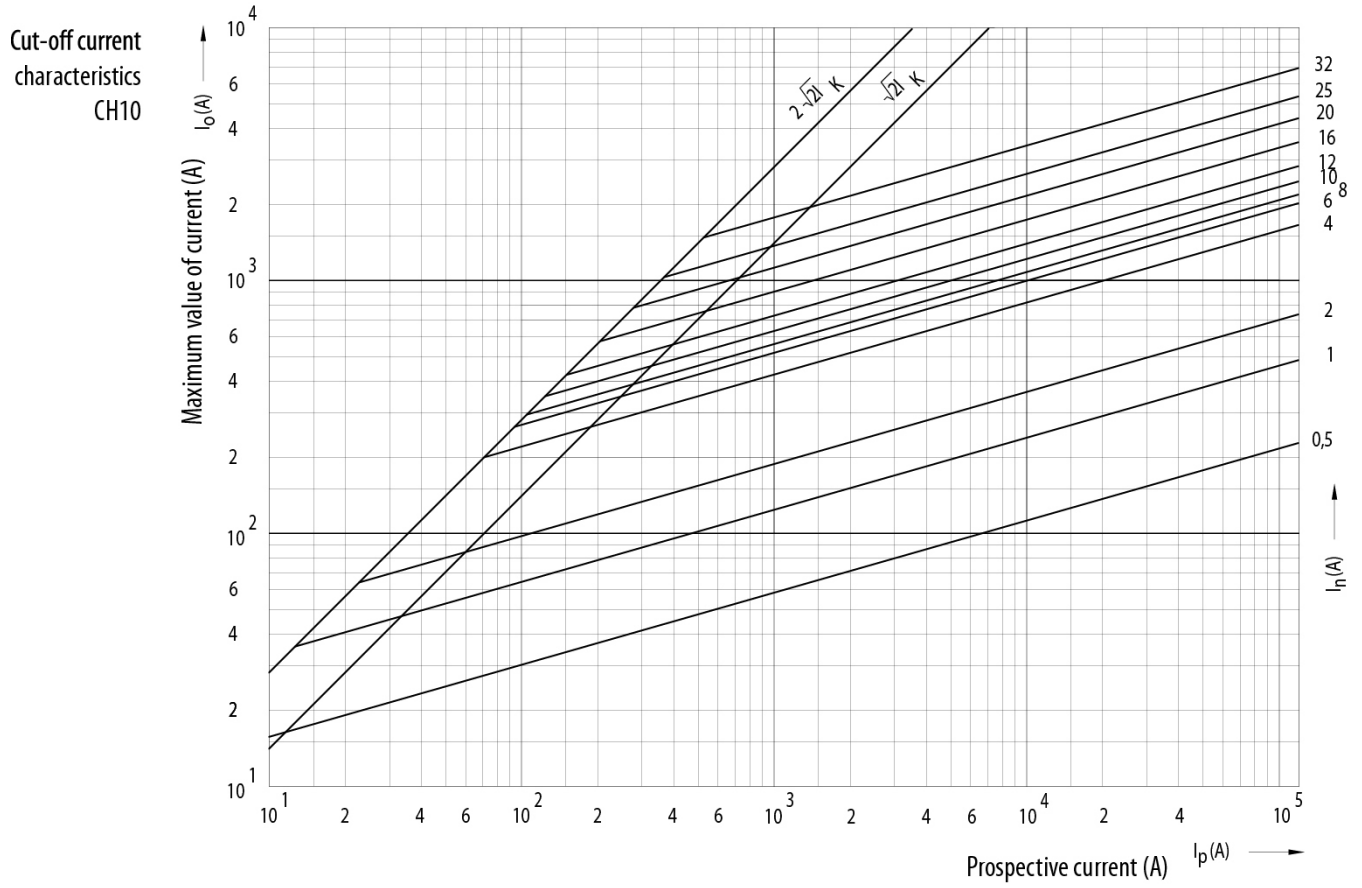


# Diagram I<sup>2</sup>t

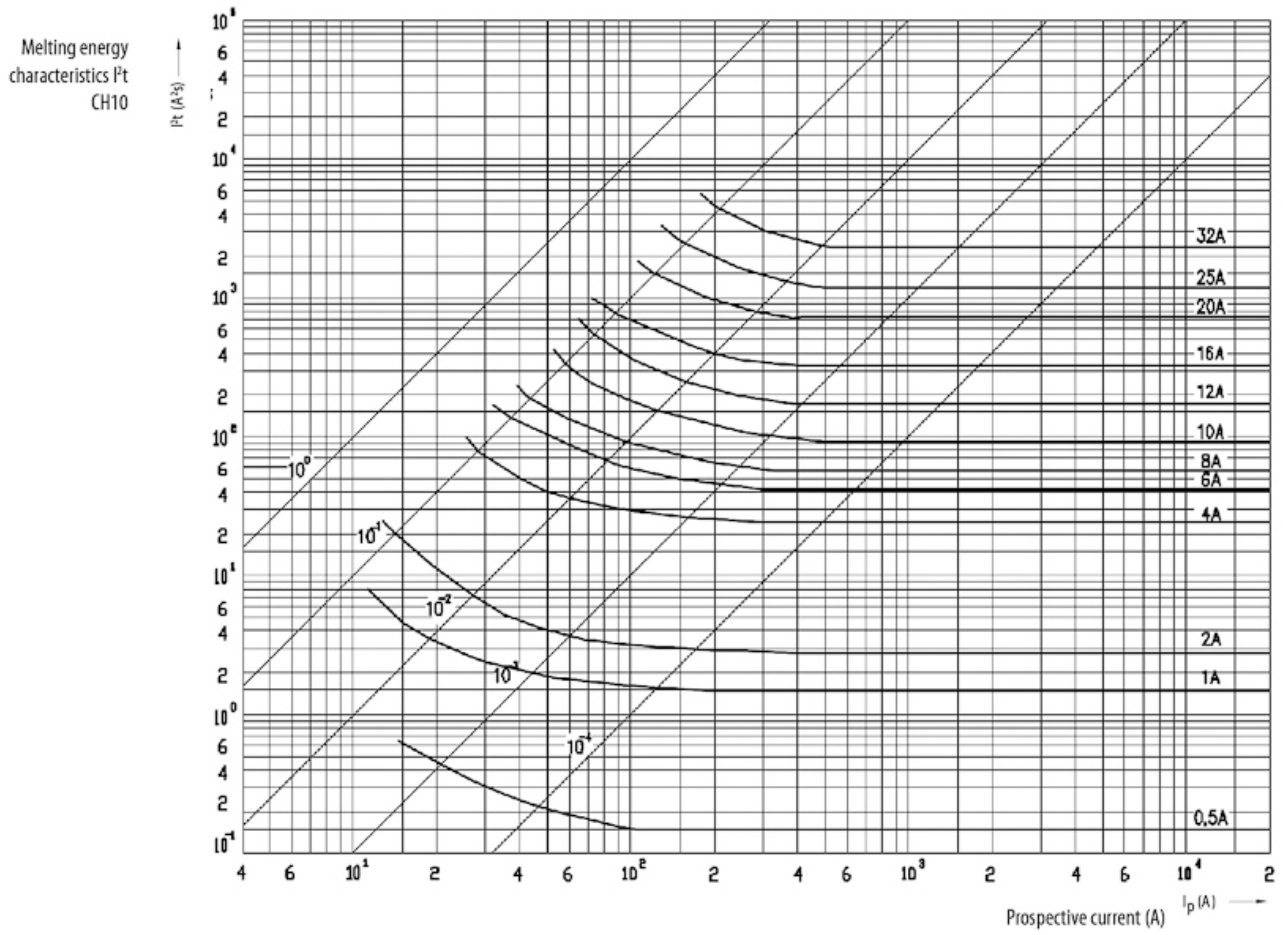


# Vremensko-strujna karakteristika

## I/t

Time current  
characteristics I/t, gG  
CH10

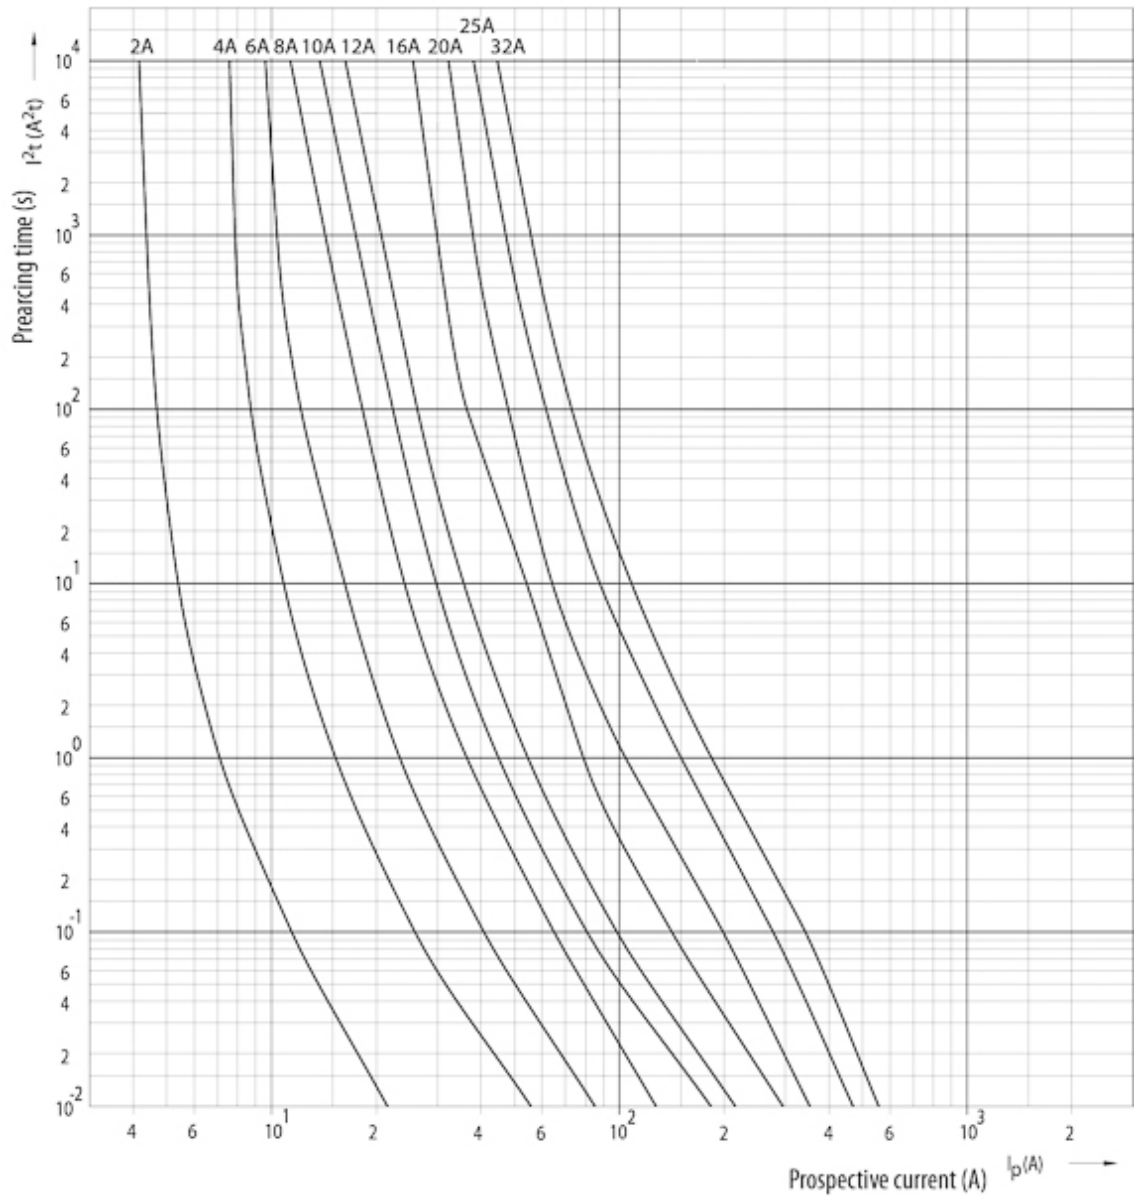

## Dimenzije

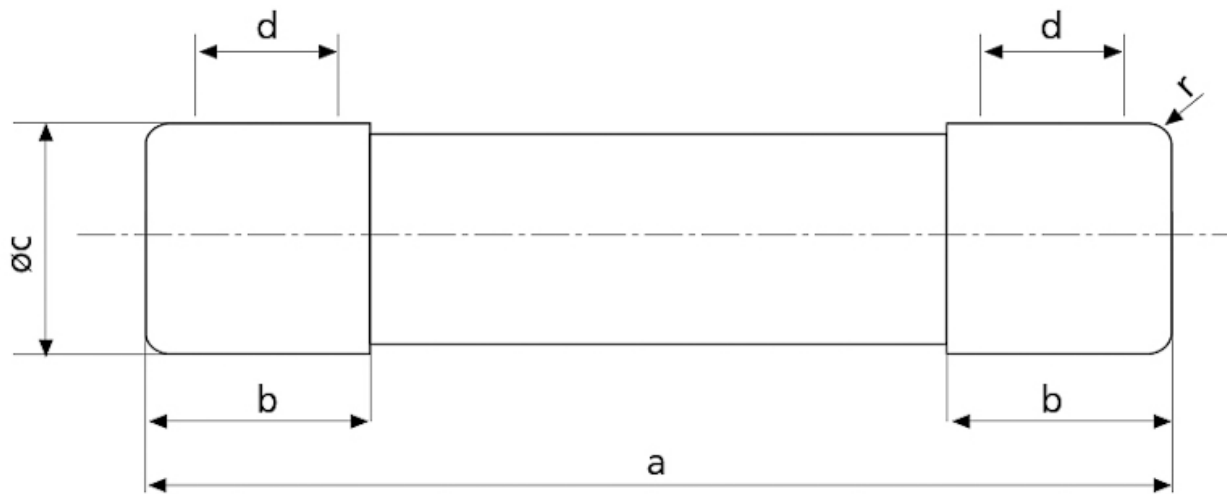

	$a$	$b_{\text{max.}}$	$c$	$d_{\text{min.}}$	$r$
8 x 32	$31,5 \pm 0,5$	6,7	$8,5 \pm 0,1$	4	$1 \pm 0,5$
10 x 38	$38,0 \pm 0,6$	10,5	$10,3 \pm 0,1$	6	$1,5 \pm 0,5$
14 x 51	$51,0 + 0,6 / - 1$	13,8	$14,3 \pm 0,1$	7,5	$\pm 1$
22 x 58	$58,0 + 0,1$	16,2	$22,2 \pm 0,1$	11	$\pm 1$