

# NH000 gG 25A/500V



## Specifikacije

Šifra proizvoda	004181207
Opis	NH000 gG 25A/500V
Težina	120
Nivo	Topljivi umetci NH (gG) 690V AC
AC Prekidna moć	120
Karakteristika	gL/gG (cable protection/equipment protection)
Indikator	Combination fuse status indicator
Grupa proizvoda	Niskonaponski topljivi umetci NV/NH
Nazivni AC napon	500
Nazivna struja	25
Veličina	NH000
Tip	NH


Web stranica proizvoda

## Druga dokumentacija






CE izjava  
Tehnički podaci

# Diagram I2t

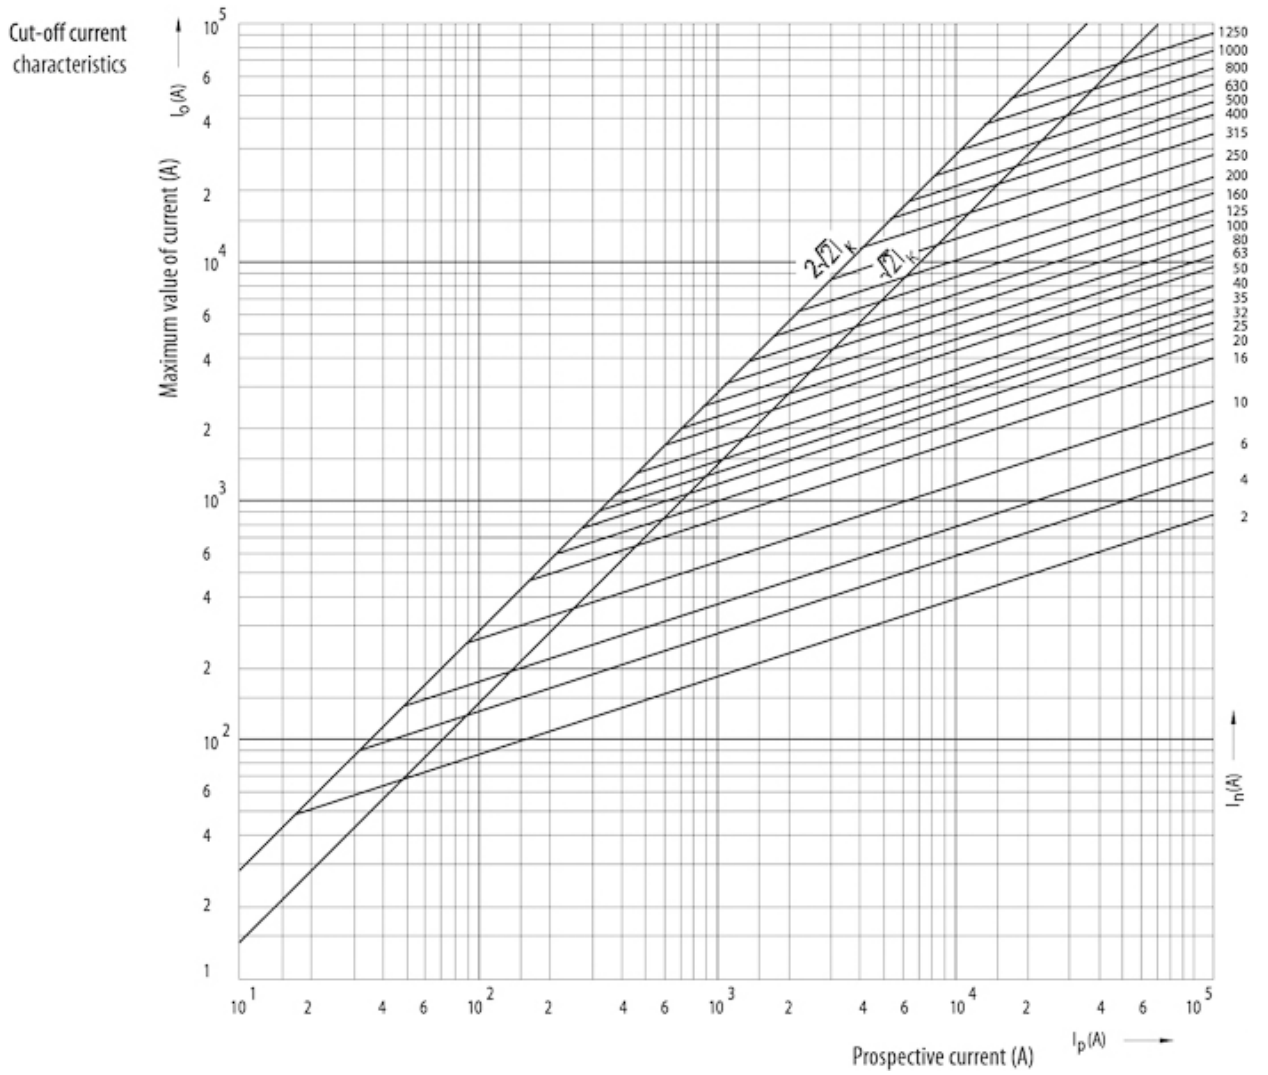

# Vremensko-strujna karakteristika

## I/t

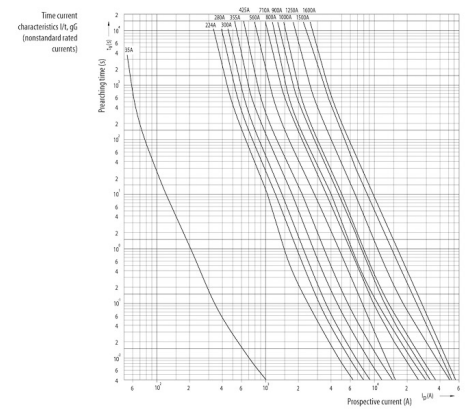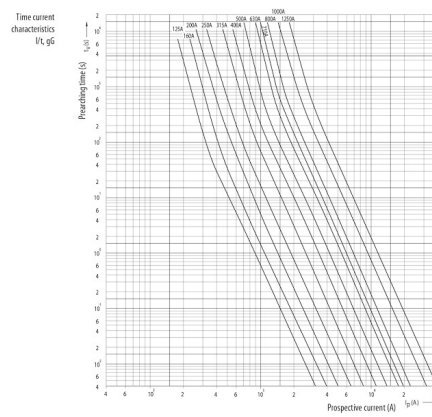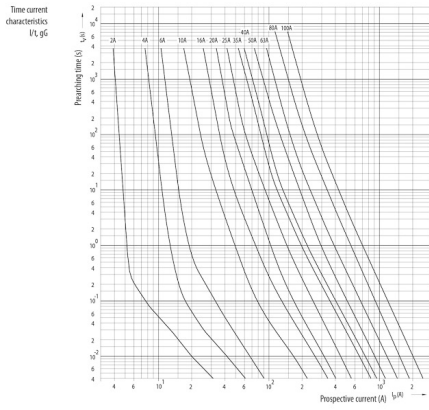

# Dimenzije

	A	B	C	D	E	F	G	H	I	J	K	
NV00C	79	53	47	35	15	21	52	7,5			6	kombi
NV00C I	79	53	47	35	15	21	52	7,5			6	kombi
NV00	79	53	47	35	15	28	56	12			6	kombi
NV00 I	79	53	47	35	15	28	56	12			6	kombi
NV0	125	68	65	35	15	28	56	12			6	kombi
NV1C	135	68	65	40	15	28	61	12			6	kombi
NV1C I	135	68	65	40	15	28	61	12			6	kombi
NV1	135	72	65	40	20	46	65	14			6	kombi
NV1 I	135	72	65	40	20	46	65	14			6	kombi
NV2C	150	72	65	48	20	46	73	14			6	kombi
NV2C I	150	72	65	48	20	46	73	14			6	kombi
NV2	150	72	65	48	26	54	73	14			6	kombi
NV2 I	150	72	65	48	26	54	73	14			6	kombi
NV3C	150	72	65	60	26	54	84	14			6	kombi
NV3	150	72	65	60	33	65	84	14			6	kombi
NV4	200	75	66	87	50	100	121	24	150	16	8	
NV4a	200	99	87	85	50	95	121	27			6	
NV4a SI*	200	99	87	85	50	95	121	27			6	
NV1/1000V	155	90	87	40	20	45	59	9			6	

