


# Products with cover frame

## Socket-outlets

### Common characteristics

- Voltage: 250 V AC
- Rated current: 16 A
- Cables: 2 x 2.5 mm<sup>2</sup> rigid/flexible cables

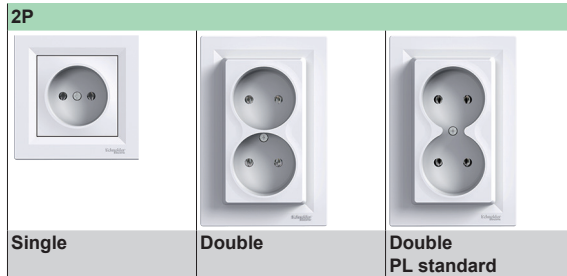

		Single	Double	Double PL standard
Degrees of protection		IP 20		
Terminals	Colour			
Screw	white	EPH3000121	EPH9700121	EPH9700221
	cream	EPH3000123	EPH9700123	EPH9700223



		Single	Single with shutters	Single with shutters and lid	Single with red center plate	Double CZ, SK standards	Double PL standard	
Degrees of protection		IP 20			IP 44	IP 20		
Terminals	Colour							
Screw	white	EPH2800121	EPH2800221	EPH2800321	EPH2800421	EPH9800121	EPH9800221	
	cream	EPH2800123	EPH2800223	EPH2800323	EPH2800423	EPH9800123	EPH9800223	



		Single	Single with shutters	Single with lid	Single with shutters and lid	Single with shutter and red center plate	Double	
Degrees of protection		IP 20				IP 44	IP 20	
Terminals	Colour							
Screw	white	EPH2900121	EPH2900221	EPH3100121	EPH3100321	EPH2900521	EPH9900121	
	cream	EPH2900123	EPH2900223	EPH3100123	EPH3100323	EPH2900523	EPH9900123	

### Antenna outlets

**Common characteristics**

- Degree of protection: IP 20
- Quality mark: CE

	TV	TV-R	TV-SAT	TV-R-SAT	TV-SAT-SAT	SAT
Type of connector	IEC Male	IEC male + female	IEC male + F	IEC male + female + F	IEC male + F + F	F
Type						
Ending (1 dB)	<input type="checkbox"/> white <input type="checkbox"/> cream					
Ending (1 dB)	EPH3200121	EPH3300121	EPH3400121	EPH3500121	EPH3600121	EPH3700121
Ending (1 dB)	EPH3200123	EPH3300123	EPH3400123	EPH3500123	EPH3600123	EPH3700123
Intermediate (4 dB)	<input type="checkbox"/> white <input type="checkbox"/> cream					
Intermediate (4 dB)	EPH3200221	EPH3300221	EPH3400221	EPH3500221	-	EPH3700221
Intermediate (4 dB)	EPH3200223	EPH3300223	EPH3400223	EPH3500223	-	EPH3700223
Intermediate (8 dB)	<input type="checkbox"/> white <input type="checkbox"/> cream					
Intermediate (8 dB)	EPH3200321	EPH3300321	EPH3400321	EPH3500321	-	-
Intermediate (8 dB)	EPH3200323	EPH3300323	EPH3400323	EPH3500323	-	-
Individual (1 dB)	<input type="checkbox"/> white <input type="checkbox"/> cream					
Individual (1 dB)	-	-	EPH3400421	-	-	-
Individual (1 dB)	-	-	EPH3400423	-	-	-

### Data and telephone outlets

**Common characteristics**

- Degree of protection: IP 20


	RJ11	RJ45		
Type				
Single	<input type="checkbox"/> white <input type="checkbox"/> cream			
Single	EPH4100121	Cat. 5e UTP EPH4300121	Cat. 5e STP EPH5000121	Cat. 6 UTP EPH4700121
Single	EPH4100123	EPH4300123	EPH5000123	EPH4700123
Terminals	Screw	IDC	IDC	IDC
	RJ11	RJ45		RJ45 + RJ12
Type				
Double	<input type="checkbox"/> white <input type="checkbox"/> cream			
Double	EPH4200121	Cat. 5e UTP EPH4400121	-	Cat. 6 UTP EPH4800121
Double	EPH4200123	EPH4400123	-	EPH4800123
Terminals	Screw	IDC	-	IDC
Terminals				IDC

### Loudspeaker outlets

**Characteristics**

- Cables: rigid cables
- Degree of protection: IP20

**Double loudspeaker outlets**









Terminals	Colour	
Screwless	<input type="checkbox"/> white <input type="checkbox"/> cream	EPH5700121
Screwless	<input type="checkbox"/> white <input type="checkbox"/> cream	EPH5700123

### Rotary dimmers

#### Common characteristics

- Rated voltage: 230 V AC 50 Hz
- Cables: 2 x 2.5 mm<sup>2</sup> rigid/flexible cables
- Operating temperature: +5°C to +35°C
- Degree of protection: IP 20
- Certification: FIMKO, NEMKO, SEMKO, TSE, VDE, UKR
- Quality mark: CE

		600 VA, two-way switch		315 VA, two-way switch
				
Terminals	Colour		with locator lamp <sup>(1)</sup>	
Screw (Pillar type)	<input type="checkbox"/> white	<b>EPH6400121</b>	<b>EPH6500121</b>	<b>EPH6600121</b>
	<input type="checkbox"/> cream	<b>EPH6400123</b>	<b>EPH6500123</b>	<b>EPH6600123</b>
Others characteristics				
Short-circuit protection		Fuse F6, 3 AH - 250 V		Electronic
Loads				
	230 V AC incandescent lamps	40-600 W	40-600 W	20-315 W
	230 V AC halogen lamps	40-600 W	40-600 W	20-315 W
	LV halogen lamps with ferromagnetic transformer	40-600 VA	40-600 VA	-
	LV halogen lamps with electronic transformer	-	-	20-315 VA

<sup>(1)</sup> Locator lamp is under the rotary control button.

## Cover frames

### Characteristics

- Degree of protection: IP 20



1 gang



4 gang horizontal



2 gang horizontal



5 gang horizontal



3 gang horizontal



6 gang horizontal



2 gang vertical




3 gang vertical

	1 gang	2 gang	3 gang	4 gang	5 gang	6 gang
Colour		Horizontal				
<input type="checkbox"/> white	EPH5800121	EPH5800221	EPH5800321	EPH5800421	EPH5800521	EPH5800621
<input type="checkbox"/> cream	EPH5800123	EPH5800223	EPH5800323	EPH5800423	EPH5800523	EPH5800623
Colour		Vertical				
<input type="checkbox"/> white	-	EPH5810221	EPH5810321	-	-	-
<input type="checkbox"/> cream	-	EPH5810223	EPH5810323	-	-	-

## Surface-mounted boxes

### Characteristics

- Degree of protection: IP 20
- Installation: screwless+screw

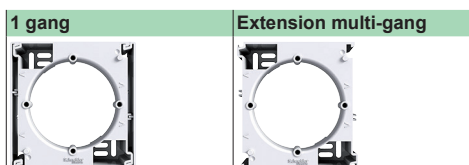

Colour		
<input type="checkbox"/> white	EPH6100121	EPH6100221
<input type="checkbox"/> cream	EPH6100123	EPH6100223

## Blind covers

### Characteristics

- Degree of protection: IP 20
- Installation: screwless + screw



Colour	
<input type="checkbox"/> white	EPH5600121
<input type="checkbox"/> cream	EPH5600123