



**2-conductor ground terminal block; 35 mm<sup>2</sup>; lateral marker slots; only for DIN 35 x 15 rail; POWER CAGE CLAMP**

Item No.: 285-137



2-conductor ground terminal block; 35 mm<sup>2</sup>; lateral marker slots; only for DIN 35 x 15 rail; POWER CAGE CLAMP

### Marking

RoHS ✓  
Compliant

### Business data

Supplier	WAGO
Item no.	285-137
GTIN / EAN	4045454507404
Content	1
Order amount	15
Customer item number	

### Notes


### Technical data


#### Miscellaneous

Safety information 1	sively on DIN-35 x 15 rail; 2.3 mm thick
Ratings per	IEC/EN 60947-7-2
Connection technology	POWER CAGE CLAMP
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	6 ... 35 mm <sup>2</sup> / 10 ... 2 AWG

<b>Technical data</b>	
<i>Fine-stranded conductor</i>	<i>6 ... 35 mm<sup>2</sup> / 10 ... 2 AWG</i>
<i>Strip length</i>	<i>25 mm / 0.98 Inch</i>
<i>Total number of connection points</i>	<i>2</i>
<i>Total number of potentials</i>	<i>1</i>
<i>Number of levels</i>	<i>1</i>
<i>Type of wiring</i>	<i>Side-entry wiring</i>
<i>Width</i>	<i>16 mm / 0.63 Inch</i>
<i>Height from upper-edge of DIN-35 rail</i>	<i>63 mm / 2.48 Inch</i>
<i>Depth</i>	<i>86 mm / 3.386 Inch</i>
<i>Design</i>	<i>horizontal</i>
<i>Type of mounting</i>	<i>Carrier rail 35 x 15</i>
<i>Marking level</i>	<i>Side marking</i>
<i>Color</i>	<i>green-yellow</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Fire load [MJ]</i>	<i>1.209 [MJ]</i>
<i>Weight [g]</i>	<i>108.279 [g]</i>
<i>Packaging type</i>	<i>BOX</i>
<i>Product Family</i>	<i>POWER CAGE CLAMP</i>
<i>Main product function</i>	<i>GND cond. term. block</i>
<i>Product type</i>	<i>High-current terminal blocks</i>

Images & drawings

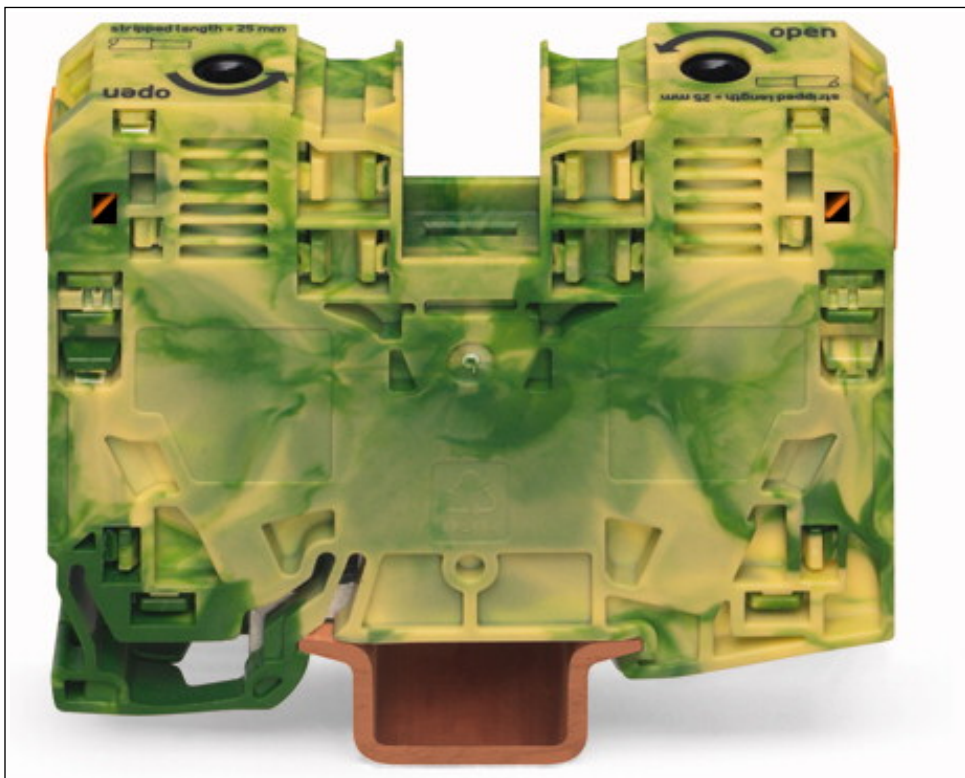

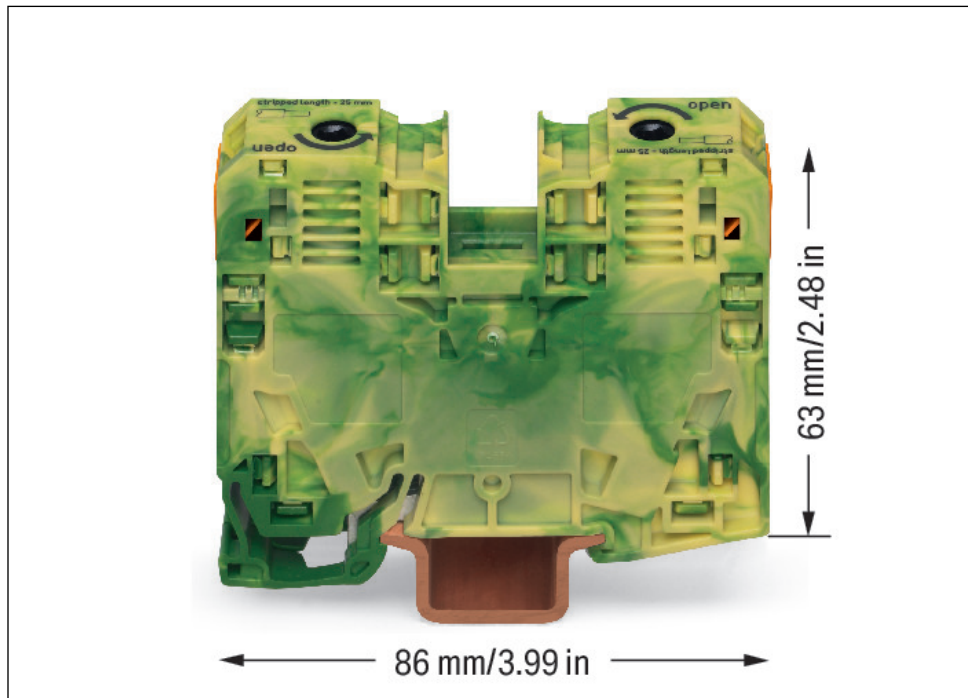

**Address**

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.