

# HF-Selectalume II for TL-D lamps

## HF-S 3/4 18 TL-D II 220-240V 50/60Hz

HF-Selectalume II TL-D is the most cost-effective, reliable and outstanding solution for fluorescent lamps. These ballasts are part of an overall high-efficiency lighting system that may help you or your customers to achieve any international or local energy code you need to comply with. HF-Selectalume II TL-D ballasts are the ideal choice for a broad range of new construction and retrofit applications within the commercial sector, including general surface mounting or office lighting, parking garages, warehouses, waterproof and other applications.

### Product data

General Information	
Application Code	II
Type Version	mk1
Lamp Type	TL-D
Number Of Lamps	3/4 piece/unit
Number Of Products On MCB (16A Type B) (Nom)	28
Automatic Restart	Yes
Operating and Electrical	
Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Operating Frequency (Nom)	45 kHz
Crestfactor (Nom)	1.7
Power Factor 100% Load (Nom)	0.98
Preheat Time	1.6 s

Mains Voltage Performance (AC)	202-254V-8%+6%
Mains Voltage Safety (AC)	198-264V-10%+10%
Earth Leakage Current (Max)	0.5 mA
Inrush Current Width	0.35 ms
Ballast Factor (Nom)	1.12
Power Losses (Nom)	6.5/12.0 W
Inrush Current Peak (Max)	18 A

Wiring	
Connector Type Input Terminals	WAGO 744 connector
Cable Capacity Output Wires Mutual (Max)	120 pF
Connector Type Output Terminals	WAGO 744 connector [ Suitable for manual wiring]
Cable Length Hot Wiring	0.75 m
Wire Striplength	8.0-9.0 mm

## HF-Selectalume II for TL-D lamps

Dual Fixture Master/Slave	Possible, lamp wires 2m max. length [ Master/Slave operation possible]
Input Terminal Cross Section	0.50-1.50 mm <sup>2</sup>
Output Terminal Cross Section	0.50-1.50 mm <sup>2</sup>
Cable Capacity Cold Output Wires - Earth (Max)	120 pF
Cable Capacity Hot Output Wires - Earth (Max)	120 pF

### System characteristics

Rated Ballast-Lamp Power	18 W
Rated Lamp Power On TL-D	18 W
System Power On TL-D	58.8/78.0 W
Lamp Power On TL-D	52.3/66.0 W
Power Loss On TL-D	6.5/12 W

### Temperature

T-Ambient (Max)	50 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	80 °C
T-Storage (Min)	-40 °C
T-Case Lifetime (Nom)	75 °C
T-Case Maximum (Max)	75 °C

### Mechanical and Housing

Housing	L 280x39x28
---------	-------------

### Emergency Operation

Nominal Light Output After 60 Seconds	100% of EBLF
Normal Operating Voltage (DC)	220-240 V

Battery Voltage Guaranteed Operation	176-275 V
Battery Voltage Guaranteed Ignition	186-275 V
Emergency Ballast Lumen Factor (EBLF) (Nom)	0.7 %
Nominal Light Output After 5 Seconds	50% of EBLF


### Approval and Application

Energy Efficiency Index	A2/A2 BAT
EMI 9 kHz ... 30 MHz	EN55015
Vibration Standard	IEC68-2-6 F c
Bumps Standard	IEC 68-2-29 Eb (10G/16ms)
Approval Marks	F-Marking CE marking ENEC certificate CCC certificate C-Tick certificate PSB certification TISI marking SIRIM approval CB Certificate CCC certificate VDE-EMV certificate
Hum And Noise Level	< 30 dB(A)

### Product Data

Full product code	872790090555700
Order product name	HF-S 3/4 18 TL-D II 220-240V 50/60Hz
EAN/UPC - Product	8711500999320
Order code	913713032666
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913713032666
Net Weight (Piece)	0.228 kg

## Dimensional drawing

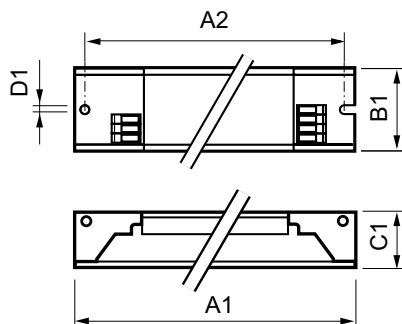

HF-S 3/4 18 TL-D II 220-240V 50/60Hz

Product	A1	B1	C1	A2	B2	D1
HF-S 3/4 18 TL-D II 220-240V 50/60Hz	280 mm	39 mm	28 mm	265 mm	4.2 mm	

# HF-Selectalume II for TL-D lamps

## Photometric data

Ballast type	Lamp type	Lamp power		T <sub>a</sub> = 40°C	T <sub>a</sub> = 50°C	T <sub>a</sub> = 60°C
HF-S 3/418 TL-D II 220-220V 50/60Hz	TL-D General	3X18W	T <sub>c</sub> Lifetime	=54°C 100,000 Hrs	=64°C 80,000 Hrs	=74°C 50,000 Hrs

Ballast type	Lamp type	Lamp power		T <sub>a</sub> = 40°C	T <sub>a</sub> = 50°C	T <sub>a</sub> = 60°C
HF-S 3/418 TL-D II 220-220V 50/60Hz	TL-D General	4X18W	T <sub>c</sub> Lifetime	=59°C 100,000 Hrs	=69°C 55,000 Hrs	X X

